

ACOUSTIC SYSTEM

C-118-PLP



KELONIK CINEMA SOUND




TECHNICAL DATA

Frequency range (-10 dB)	40 Hz - 500 kHz
Nominal Impedance	8 Ω
POWER CAPACITY	
Continuous Pink Noise (1)	350 W
Continuous Program	700 W
Sensitivity 1W/1m	96 dB S.P.L.
Crossover Frequency	80-100 Hz recommended
Dimensions (H x W x D)	98 x 63 x 26 cm
Net Weight	34 kg

(1) Based on a 2 hour test using a continuous 6 dB crest factor pink noise signal band-limited according to IEC 268-1 (1985)

COMPONENTS

Cabinet	C-118-PLP
Loudspeaker 18"	S-18 P

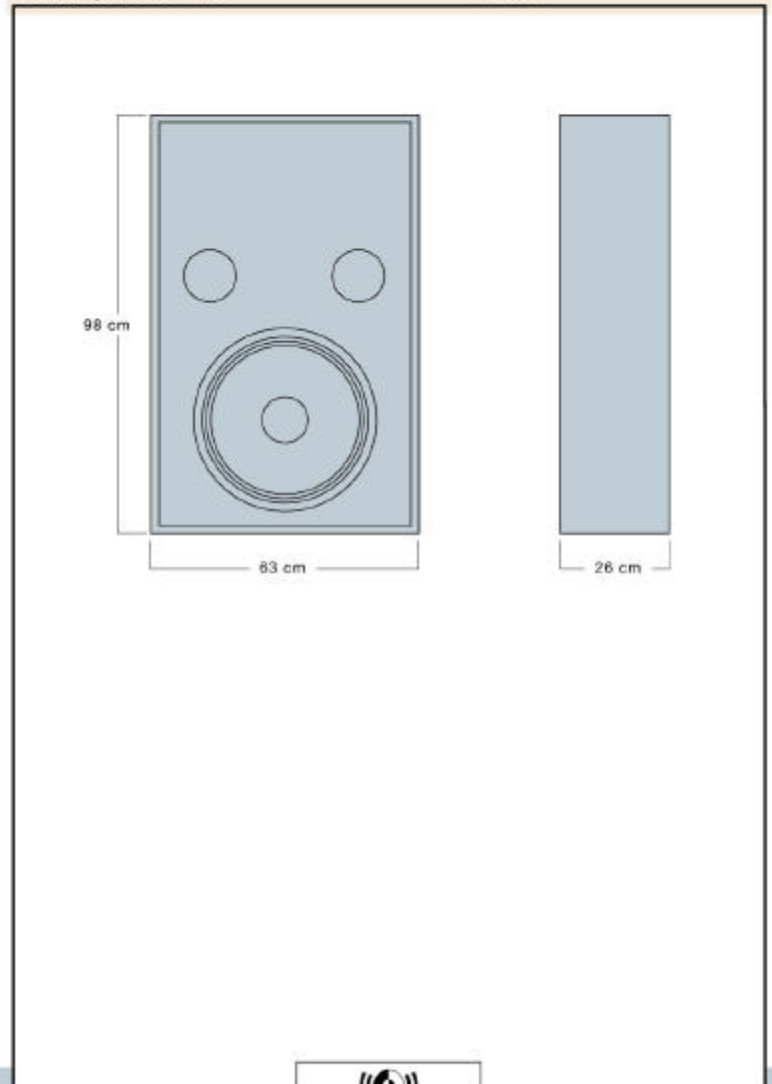

K.C.S. **C-118-PLP** is an extra-flat subwoofer system which is particularly suitable for critical situations where the projection screen is very close to the rear wall. This system features a Bass Reflex cabinet with direct radiation technology and fitted with one 18" \varnothing high performance woofer. This system is designed for small and medium size auditoria.

SUMINISTROS  **KELONIK, S.A.**

Badajoz, 159 bis 08018 Barcelona (SPAIN) Tel. 34-93 300 43 61
Fax 34-93 300 03 15 E-mail: sk@kelonik.com

